

Bringing the worlds best chillers to Australia

MODEL:

SG1R-B

QUICK INFO

Units encompass the best brand name parts available in the world, designed by the best engineers and built by a quality long term manufacturer, to bring a reliable product to the market.

Polished stainless steel inner, LG compressor, LOW E glass and German EBM fans make unit robust for tough conditions.

PARTS AND ENERGY INFO

- Cyclopentane foaming
- German energy saving EBM fans
- LED lighting
- LOW E glass
- R600 100% ozone safe gas
- LG Compressor
- Meanwell Transformer From Taiwan
- Philips LED Lighting (Same Factory)



SPECIFICATIONS

Capacity (litres) 129
Holds (cans) 140
Noise Level 47
Consumption 1.23

Consumption 1.23Kwh/24Hrs
Unit dimensions (WxDxH) 600 x 500 x 840

Lockable Yes Gross weight 50 kg




 $[\]star\star$ Specifications and price of this product may change at any time

^{**}For more information about this product please call us or visit our website.



PRODUCT INFORMATION

SG1R-B

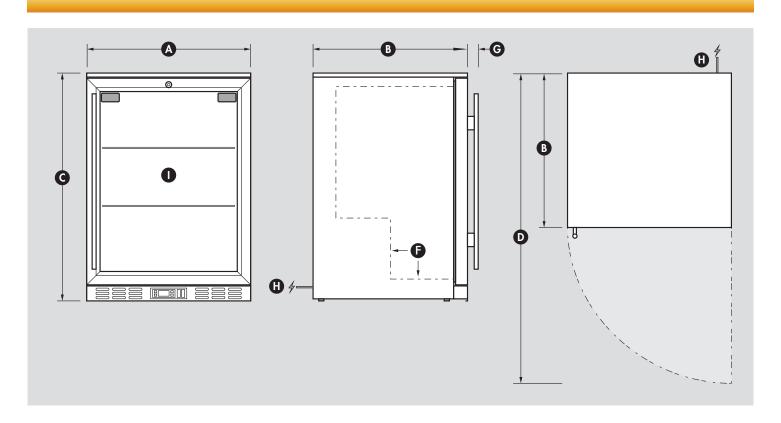

INFORMATION

DIMENSIONS

\bigcirc	Overall width	600mm
\bigcirc	Overall depth	495mm
\bigcirc	Overall height - includes feet	840mm
(Overall depth with door open	1070mm
E	Height of hinge cap (included in	n height above) N/A
F	Internal step inside unit	190mm In & 190mm High
(G)	Depth of handle (adds to depth	above) 40mm
\bigoplus	Power cord location & length	1800mm
	Internal dimensions (WxDxH)	520 x 380 x 680mmH

Note: Door opens maximum 3mm outside diameter

INSTALLATION & BUILDING INTO CAVITY'S

 $\begin{array}{ll} \mbox{Minimum cavity size needed (WxDxH)} & \mbox{620 x 600 x 850mmH} \\ \mbox{Venting type of fridge} & \mbox{Front Venting, Through Grill} \end{array}$

Note: If wanting a 'cabinet door' in front of fridge door please contact us

OTHER HELPFUL INFORMATION

Height floor to bottom of door

Door size (WxH)

Feet height fully tightened

Height adjustment available on current feet

Change feet size for extra height option

Shelf Qty / Size

2 x (500mmW x 350mmD)

Wine Shelf available (Y/N)

Yes

PERFORMANCE

Cooling Cools easily to (1oC)
Application suitability Commercial / Alfresco / Indoor

Maximum operating ambient temperature38oCOutdoor official IP ratingIP22Meps Energy Approved & Food GradeYes