





CERAMIC TOILET SUITE



Ceramic wall faced toilet suite Clean Flush, Nanoglaze, Easy Care Height

- Stylish minimalist design, sits flat against wall
- Clean Flush rimless pan design for an efficient, powerful flush Easy care height, pan height 435 mm
- White vitreous china with nanoglaze surface, easy to clean
- Soft-closing, easy-clean quick release seat with stainless steel pins
- S or P trap
- Universal cistern, suits back entry or bottom entry plumbing

ORDER CODE	191760	Modia WF, Deluxe seat	Old code: STO-305-05		
	191758	Modia WF, Slim seat	Old code: STO-305-03 Old code: n/a Old code: STO-305-01		
	191843	Modia WF, Flat seat			
	191756	Modia WF, Classic seat			

Universal, suits back entry inlet or bottom entry plumbing. Left and CISTERN

right bottom entry inlet points.

Wall faced close coupled with rimless pan design. PAN Universal trap, suitable for S or P trap installations. TRAPS Quick release seat with stainless steel hinges, soft closing. SEAT

4 star rating 4.5/3 litre water saving flush. WELS

Variable 90-180 using supplied connector; 150mm recommended. SETOUT This is a close coupled toilet suite — the cistern is fixed directly to the FIXING pan and does not require wall fixing.

Pan may be bedded with cement base or using silicone sealant.

OPTIONS SEAT TOILET

DELUXE SEAT (40mm lid)

- Premium quality
- Easy to clean, anti-scratch
- Rigid, ceramic-like surface
- Made from Thermoset (UF)

SLIM SEAT (20mm lid)


- Premium quality
- Easy to clean, anti-scratch
- Rigid, ceramic-like surface
- Made from Thermoset (UF)


FLAT SEAT


- Premium quality
- Easy to clean, anti-scratch
- Rigid, ceramic-like surface - Made from Thermoset (UF)

CLASSIC SEAT (40mm lid)

- Lightweight, shiny finish
- Easy to clean
- Rigid, ceramic-like surface
- Made from Thermoplastic (PP)











🌎 Rimless Clean Flush pan – for an efficient, powerful flush. 🔷 Nanoglaze surface – ultra-smooth, anti-bacterial, easy to clean. 🛕 Easy care height – making it easier to get on and off the seat.



bathroom | kitchen | laundry

Please note

- Installation shall be in accordance with AS/NZS3500.
- All measurements are in millimetres. Height dimensions are to base of pan. Make allowance for bedding.
- Bedding: Pan may be bedded with cement base or using silicone sealant. Fix pan to floor using a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast-drying cement.
- Bracket fixing: The pan should be bedded with silicone sealant and fixed with the brackets supplied.
- Do NOT use epoxy type adhesives. Dimensions are nominal and subject to normal ceramic manufacturing variations.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.

TOILET COLOUR PACK

FOR ARKO, MODIA AND LIMNI WALL FACED TOILET SUITES

Why colour packs?

Colour packs allow you to customise the colour of your toilet flush buttons (and seat fittings) to complement design features of your bathroom.


The flush buttons for all toilets are supplied in Chrome finish as standard. The cover plates for toilet seat fittings are supplied in stainless steel as standard. The cover plates are normally only visible when the toilet seat is up.

What does a colour pack include?

- 1x flush button in the chosen colour
- 2 x cover plates for seat fittings in the chosen colour



Colour pack components and colours

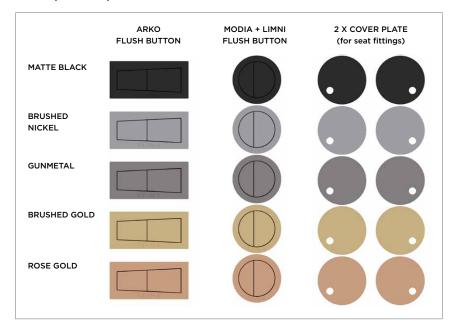

Toilet model and seat style

Colour pack order codes

ARKO WF	MATTE BLACK	BRUSHED NICKEL	GUNMETAL	BRUSHED GOLD	ROSE GOLD
Arko with Deluxe seat / Classic seat	191294	191300	191312	191324	191318
Arko with Slim seat	191292	191298	191310	191322	191316
Arko with Flat seat	191293	191299	191311	191323	191317
MODIA + LIMNI WF	MATTE BLACK	BRUSHED NICKEL	GUNMETAL	BRUSHED GOLD	ROSE GOLD
Modia/Limni with Deluxe seat / Classic seat	191291	191297	191309	191321	191315
Modia/Limni with Slim seat	191289	191295	191307	191319	191313
Modia/Limni with Flat seat	191290	191296	191308	191320	191314



Please note

- Installation shall be in accordance with AS/NZS3500.
- All measurements are in millimetres. Height dimensions are to base of pan. Make allowance for bedding. - Bedding: Pan may be bedded with cement base or using silicone sealant.
- Fix pan to floor using a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast-drying cement.
- $\ \, \text{Bracket fixing: The pan should be bedded with silicone sealant and fixed with the brackets supplied.}$ Do NOT use epoxy type adhesives.
- Dimensions are nominal and subject to normal ceramic manufacturing variations.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.